


2S Clamp with Lining (M8/10)

(A 05 136)

for steel, copper, cast iron and plastic (multilayer) pipe 10 - 225 mm

M8/10

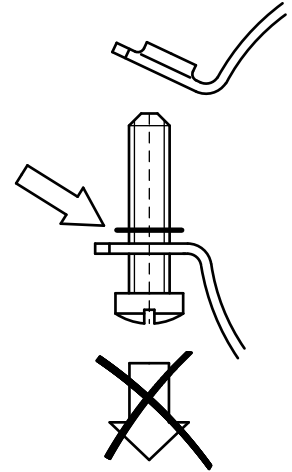

Features and benefits

- gapless range
- rubber lining grips in steel parts to prevent sliding of the lining
- anti loss washers prevent screws from falling out during installation
- temperature resistance from -30 °C to +120 °C
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 22 dB(A)



RAL-GZ 655/B
Cert.Nr. 2021-06



1503-002-15

Part No.	D (mm)	D (")	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F _{a,z} (N)	RAL	Pack 1
33435014	10 - 14	1/8 - 1/4	6 - 8	M8/10	51	40	28	20 x 1.00	M5	330	RAL ¹	50
33435019	15 - 19	3/8	10	M8/10	56	45	30	20 x 1.00	M5	330	RAL ¹	50
33435024	20 - 24	1/2	15	M8/10	62	51	33	20 x 1.00	M5	330	RAL ¹	50
33435030	25 - 30	3/4	20	M8/10	69	58	37	20 x 1.00	M5	330	RAL ¹	50
33435037	31 - 37	1	25	M8/10	75	64	40	20 x 1.00	M5	330	RAL ¹	50
33435046	38 - 46	1 1/4	32	M8/10	84	74	45	20 x 1.25	M5	500	RAL ¹	50
33435052	47 - 52	1 1/2	40	M8/10	93	83	49	20 x 1.25	M5	500	RAL ¹	50
33435061	53 - 61	2	50	M8/10	99	89	52	20 x 1.25	M5	500	RAL ¹	50
33435067	62 - 67	-	-	M8/10	106	95	55	20 x 1.25	M5	500	RAL ¹	50
33435074	68 - 74	-	-	M8/10	118	103	60	20 x 1.50	M6	850	RAL ¹	50
33435081	75 - 81	2 1/2	65	M8/10	124	109	63	20 x 1.50	M6	850	RAL ¹	50
33435087	82 - 87	-	-	M8/10	130	115	66	20 x 1.50	M6	850	RAL ¹	50
33435095	88 - 95	3	80	M8/10	143	127	72	23 x 2.00	M6	1,000	RAL ¹	50
33435103	96 - 103	-	-	M8/10	153	136	76	23 x 2.00	M6	1,000	RAL ¹	50
33435112	104 - 112	-	-	M8/10	159	142	79	23 x 2.00	M6	1,000	RAL ¹	25
33435118	113 - 118	4	100	M8/10	168	151	84	23 x 2.00	M6	1,000	RAL ¹	25
33435127	119 - 127	-	-	M8/10	178	161	89	23 x 2.00	M6	1,000	RAL ¹	25
33435137	128 - 137	-	-	M8/10	185	168	92	23 x 2.00	M6	1,000	RAL ¹	25
33435144	138 - 144	5	125	M8/10	194	177	97	23 x 2.00	M6	1,000	RAL ¹	25
33435153	145 - 153	-	-	M8/10	203	186	101	23 x 2.00	M6	1,000	RAL ¹	25
33435162	154 - 162	-	-	M8/10	211	194	105	23 x 2.00	M6	1,000	RAL ¹	15
33435172	163 - 172	6	150	M8/10	227	210	114	25 x 2.50	M6	2,350	RAL ¹	15
33435183	173 - 183	-	-	M8/10	239	221	120	25 x 2.50	M6	2,350	RAL ¹	15
33435194	184 - 194	-	-	M8/10	249	232	125	25 x 2.50	M6	2,350	RAL ¹	15
33435205	195 - 205	-	-	M8/10	260	243	130	25 x 2.50	M6	2,350	RAL ¹	15
33435216	206 - 216	-	-	M8/10	271	253	136	25 x 2.50	M6	2,350	RAL ¹	10
33435225	217 - 225	8	200	M8/10	279	261	140	25 x 2.50	M6	2,350	RAL ¹	10

